


King Bulk



Bulk Liquid Logistics

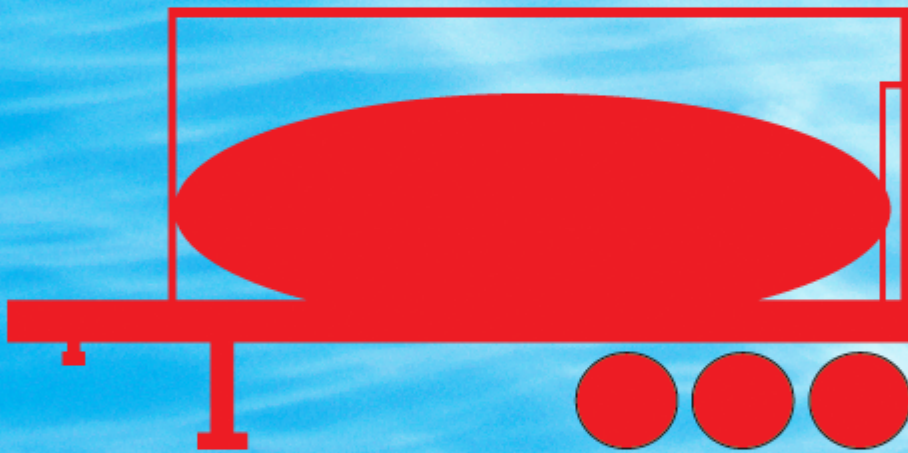

King Trading Co., Ltd.



1 layer PE with thickness of 1mm



King Bulk

- One-ply Co-extrusion Polyethylene Layer : 1000 micron
- Total weight : Approx 60KGS
- Tensile strength : MD(ASTM D638 V) : 40Mpa
- Tensile strength : TD(ASTM D638 V) : 40Mpa
- Tear Resistance : MD(ASTM D1004) : 110
- Tear Resistance : TD(ASTM D1004) : 120
- Puncture Resistance : (ASTM D4833) : 140NT
- Elongation MD(ASTM D638 V at 50 mm) : 800%
- Elongation TD(ASTM D638 V at 50 mm) : 800%

CERTIFICATIONS

The tank meets the standards of EC, US FDA and Cosher Certificates.

Field of Application

Single use for foodstuff, non-hazardous pharmaceutical, chemical and industrial liquid.



2 layers PE(0.3mm per layer)



King Trading Co., Ltd.

Tel: +81-80-6505-1226 Fax: +81-50-3737-9118

Mail: info@king-trading.jp